


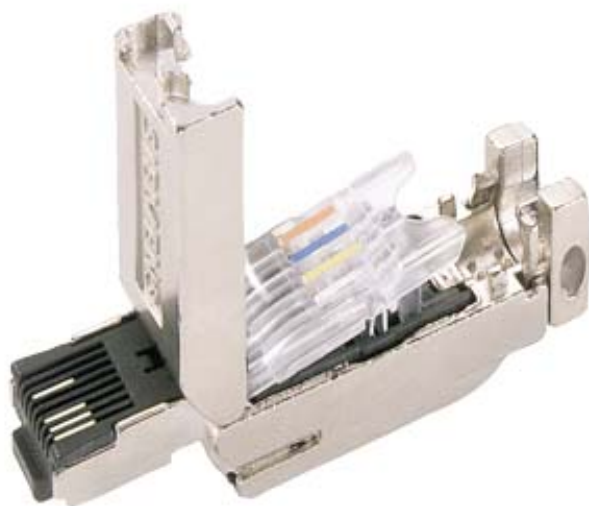

IE FC RJ45 PLUG 180 2X2,
RJ45 PLUG CONNECTOR (10/100MBIT/S) W. RUGGED
METAL HOUSING AND FC CONNECTING METHOD,
FOR IE FC CABLE 2X2 180 DGR CABLE OUTLET **1 PACK**
= 1 PCS

Transfer rate

• 1 / for Industrial Ethernet	10 Mbit/s
• 2 / for Industrial Ethernet	100 Mbit/s

Interfaces

Number of electrical connections

• for Industrial Ethernet FC TP cables	4
• for network components and terminal equipment	1

Design of the electrical connection / FastConnect	Yes
---	-----

Mechanical data

material / of the housing	metal
---------------------------	-------

Design, dimensions and weight

Width	13.7 mm
Height	16 mm
Depth	55 mm
Net weight	35 g

Permitted ambient conditions

Ambient temperature

• during operating	-40 ... +70 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C

Relative humidity

• at 25 °C / without condensation / during operating / maximum	95 %
Protection class IP	IP20
Product properties, functions, components / general	
Product feature / [not supplied - silicon-free]	Yes
Composant produit	
• décharge de traction	Yes
Standards, specifications, approvals	
Verification of suitability	
• RoHS conformity	Yes
• UL-registration	Yes
letzte Änderung:	May 14, 2012